




Bluetooth® Wireless Technology Digital Clocks

# Smart-Sync™

Digital Clocks

For any customer who requires time synchronization, the Bluetooth® wireless technology solution is an uncomplicated, easy to install, product that continually and automatically recreates its own network. Competitively priced, Smart-Sync™ clocks with Bluetooth wireless technology are available solely through Primex, the sync time leader, and our certified partner network.

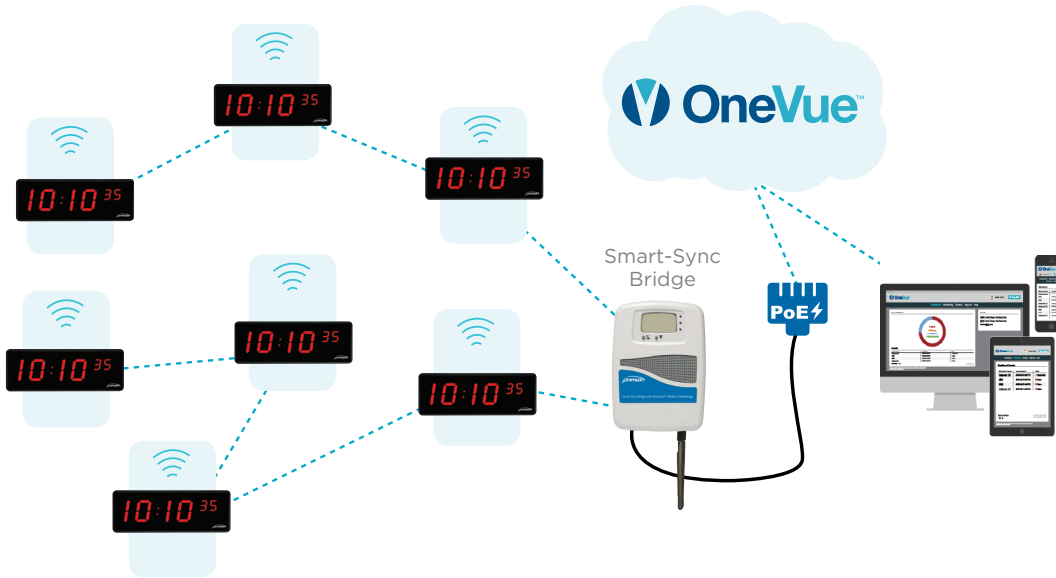

- Smart-Sync clocks 'wake up' once daily
- Clocks synchronize time via Smart-Sync Bridge
- Clocks form network based on strongest signal to another clock or the Smart-Sync Bridge
- If one clock fails, other clocks will 'find their way home' to the strongest signal
- Smart-Sync Bridge reports clock status to OneVue
- OneVue accessible via PC or mobile devices
- Two-year warranty on Smart-Sync digital clocks

### SMART-SYNC SURFACE-MOUNT MODELS WITH 2.5" DIGITS

4-Digit	6-Digit	Description
B2007A200	B2007A202	4° Slope Bracket, 120 VAC, 10' (3.0m) cord with plug
B2007A212	B2007A419	18° Slope Bracket, 120 VAC, 10' (3.0m) cord with plug
B2002Y200	B2002Y202	4° Slope Bracket, 24 VAC, 10" (25cm) cord with pigtail
B2002Y212	B2002Y419	18° Slope Bracket, 24 VAC, 10" (25cm) cord with pigtail

### SMART-SYNC SURFACE-MOUNT MODELS WITH 4" DIGITS

4-Digit	6-Digit	Description
B2007A201	B2007A203	4° Slope Bracket, 120 VAC, 10' (3.0m) cord with plug
B2002Y201	B2002Y203	4° Slope Bracket, 24 VAC, 10" (25cm) cord with pigtail

### SMART-SYNC FLUSH-MOUNT MODELS WITH 2.5" DIGITS

6-Digit	Description
B2007Y202F	30" (45.72cm) Cord with pigtail

- Add a "G" after the item number for green LED surface or flush mount models  
Example: B2007A200G, B2007Y202FG

### DUAL CLOCK BRACKET KIT

Any two surface-mount digital clocks can be mounted back-to-back to provide greater visibility in hallways and larger areas. Select the correct Dual Clock Bracket Kit for your application below.

#### DUAL CLOCK BRACKET KIT

Mount	2", 4-Digit	2", 6-Digit	4", 4-Digit	4", 6-Digit*
Ceiling	24CBRK	26CBRK	4XBRK	4XBRK
Wall	24WBRK	26WBRK	4XBRK	NA

\* 4" 6-digit Clock can be ceiling mount only.



Surface Mount



Flush-Mount



Dual Mount - Ceiling



Dual Mount - Wall

## ABOUT SMART-SYNC DIGITAL CLOCKS & TIMERS

### Product Features:

- LED Digit Dimmer Options: 100%, 75%, 50% and 25%
- Dual Mount Clock Kit combines 2 single clocks
- Surface and flush-mount models
- Available with red or green digits

### Power Supplies


- 120 VAC (100-240)/ 50-60 cycle, 10' (3.0m) cord with plug, UL/cUL listed
- 24 VAC (18-28), 10" (25cm) cord with pigtail

### Digital Clock Specifications:

- 7-segment LED digits
- 12- or 24-hour time display
- PM indicator light
- Alternating time and date display option
- Available in 2.5 or 4 inch character options
- Operating temperature range: 32° - 95°F (0° - 35°C)
- Storage temperature range: -4° - 158° F (-20° - 70° C)
- Communicates with Smart-Sync Bridge via Bluetooth® low energy wireless technology

### SINGLE CLOCK DIMENSIONS

Clock Type	Weight	Height	Width	Depth
		A	B	C
2.5" (6.4cm), 4-digit	1.8 lbs. (0.8 kg)	5.0" (12.7cm)	10.8" (27.4cm)	2.8" (5.6cm)
4" (10.16cm), 4-digit	3.9 lbs. (1.8 kg)	8.0" (20.3cm)	17.9" (45.5cm)	2.4" (6.1cm)
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	5.0" (12.7cm)	13.8" (34.9cm)	2.2" (5.6cm)
4" (10.16cm), 6-digit	4.6 lbs. (2.1 kg)	8.0" (20.3cm)	23.3" (59.2cm)	2.4" (6.1cm)

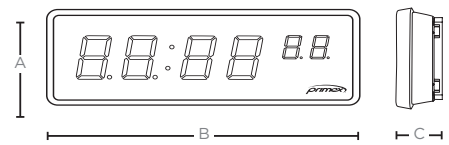

### DUAL-MOUNT DIMENSIONS

Clock Type	Width from Wall	Height from Ceiling	Depth of Two Clocks
	A	B	C
Dual 2.5" (6.4cm), 4-digit	13.8" (35.1cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 4-digit	20.9" (53.1cm)	11.0" (27.9cm)	6.3" (16.0cm)
Dual 2.5" (6.4cm), 6-digit	16.8" (42.7cm)	8.0" (20.3cm)	5.9" (15.0cm)
Dual 4" (10.16cm), 6-digit	NA*	11.0" (27.9cm)	6.3" (16.0cm)




\* 4", 6-digit clocks cannot be dual-mounted to the wall.

Note: Dual mount clocks shipped disassembled to simplify installation.

### FLUSH-MOUNT DIMENSIONS

Clock Type	Weight	Width	Height	Depth
		A	B	C
2.5" (6.4cm), 6-digit	2.0 lbs. (0.9 kg)	16.8" (42.7cm)	6.5" (16.5cm)	3.4" (8.6cm)

When ordering for new construction projects, the junction boxes for flush-mount installation may be ordered to ship in advance of clocks. Please request special shipping and provide dates when ordering.

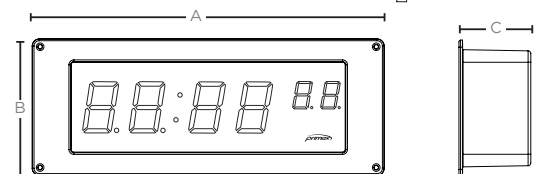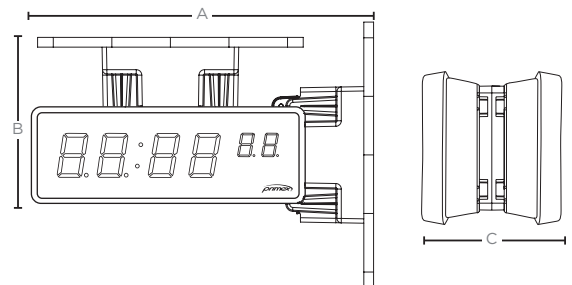

To Learn More:

Call 800.537.0464

Email: [info@primexinc.com](mailto:info@primexinc.com)

[primexinc.com](http://primexinc.com)

The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Primex, Inc. is under license. Other trademarks and trade names are those of their respective owners.

OneVue is a trademark of Primex. The innovative technology software solution for facility and time synchronization monitoring and reporting. All other trademarks are the property of their respective owners.

©2017 Primex. The Primex logo is a registered trademark of Primex.  
All Rights Reserved. 6.17